

SMALL-SCALE C&I ESS SOLUTION

DEYE SUMMER BOS SERIES



Convenient

- Quick installation standard of 19-inch embedded designed module is comfortable for installation and maintenance.



Intelligent BMS

- It has protection functions including over-discharge, over-charge, over-current and over-high or low temperature. The system can automatically manage charge and discharge state and balance current and voltage of each cell.



Eco-friendly

- The whole module is non-toxic, non-polluting and environmentally friendly.



Safe and reliable

- Cathode material is made from LiFePO₄ with safety performance and long cycle life. The module has less self-discharge, up to 6 months without charging it on shelf, no memory effect, excellent performance of shallow charge and discharge.



Flexible configuration

- Multiple battery modules can be in parallel for expanding capacity and power. Support USB upgrade, remote up grade (Compatible with Deye inverter).



Wide temperature

- Working temperature range is from -20°C to 55°C, with excellent discharge performance and cycle life.

≥6000

Cycles

Flexible
Expansion

35kWh ~ 87kWh

70%

EOL


10 years

Warranty for long-term
peace of mind

Rack-Mounted Battery (HV)

Model		BOS-G-Pro												
Main Parameter														
Cell Chemistry		LiFePO ₄												
Module Energy (kWh)		5.12												
Module Nominal Voltage (V)		51.2												
Module Capacity (Ah)		100												
Battery Module Number		BOS-G25-Pro	BOS-G30-Pro	BOS-G35-Pro	BOS-G40-Pro	BOS-G45-Pro	BOS-G50-Pro	BOS-G55-Pro	BOS-G60-Pro	BOS-G65-Pro	BOS-G70-Pro	BOS-G75-Pro	BOS-G80-Pro	BOS-G85-Pro
Battery Module Qty In Series (Optional)		5 (Min)	6	7	8	9	10	11	12	13	14	15	16	17 (Max)
System Nominal Voltage (V)		256	307.2	358.4	409.6	460.8	512	563.2	614.4	665.6	716.8	768	819.2	870.4
System Operating Voltage (V)		220~292	264~350.4	308~408.8	352~467.2	396~525.6	440~584	484~642.4	528~700.8	572~759.2	616~817.6	660~876	704~934.4	748~992.8
System Energy (kWh)		25.6	30.72	35.84	40.96	46.08	51.2	56.32	61.44	66.56	71.68	76.8	81.92	87.04
System Usable Energy (kWh)		25.6	30.72	35.84	40.96	46.08	51.2	56.32	61.44	66.56	71.68	76.8	81.92	87.04
Rated DC Power (kW)		25.6	30.72	35.84	40.96	46.08	51.2	56.32	61.44	66.56	71.68	76.8	81.92	87.04
Charge / Discharge ²	Recommend	50												
	Nominal	100												
	Current (A)	125												
Working Temperature (°C)		Charge : 0 ~ 55 / Discharge : -20 ~ 55												
Status Indicator		Yellow : Battery High Voltage Power On Red : Battery System Alarm												
Communication Port		CAN2.0 / RS485												
Humidity		5% ~ 85%RH												
Altitude		≤3000m												
IP Rating of Enclosure		IP20												
Dimension (W×D×H,mm)		530 × 602 × 1629				530 × 602 × 2219				1060 × 602 × 1629				
Weight Approximate (kg)		290	336	382	428	484	530	576	622	699	745	791	837	883
Installation Location		Rack Mounting												
Storage Temperature (°C)		0 ~ 35												
Recommend Depth of Discharge		100%												
Cycle Life		25±2°C, 0.5C / 0.5C, EOL70%≥6000												
Warranty		10 years												
Certification		UN38.3 / CE / CE-EMC / IEC62040 / CEC / VDE												

1. DC Usable Energy, test conditions : 100% DOD, 0.3C charge & discharge at 25°C. System usable energy may vary due to system configuration parameters.
2. The current is affected by temperature and SOC.
3. The warranty is due whichever reached first of warranty period or life cycle power.
4. Made in China.

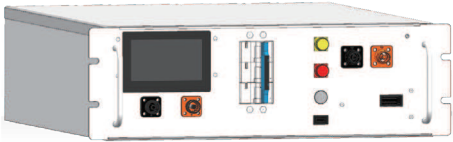Model	Description	
BOS-G-PDU-2	High Voltage Battery cluster control box conforming to European or British Standards	
Operating Voltage Nominal Charge/Discharge Current Max.Charge/Discharge Current DC Input Rating Operating Temperature Range Ingress Protection Dimension (W×D×H) Weight Approximate	200 ~ 1000Vdc 100A 120A 12±2%V / 4.15A -20 ~ 65°C IP20 440×570×150mm 19kg	
High voltage box Standard configuration: ① 120 ohm terminal resistance ② 250mm communication cable ③ 140mm power cable ④ 2.1m power cable ⑤ EPCable2.0 (Standard 2-meter power cable connected to the positive pole of the external PCS) ⑥ ENCable2.0 (Standard 2-meter power cable connected to the negative pole of the external PCS) ⑦ 1000mm communication cable between two battery racks ⑧ 1000mm power cable between the two battery racks ⑨ 140 mm ground wire	① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨	
BOS-G-Pack5.1	5.12 kwh battery module	
Battery Type Nominal Voltage Rated Capacity Rated Energy Nominal Charge/Discharge Current Peak.Discharge Current Charge Temperature Discharge Temperature Storage Temperature Ingress Protection Dimension (W×D×H) Weight Approximate	LiFePO₄(LFP) 51.2Vdc 100Ah 5.12kWh 100A 120A 0 ~ 55°C -20°C ~ 55°C 0°C ~ 35°C IP20 440×585×133mm 46kg	 ① ②
Battery module Standard configuration: ① 160mm communication cable ② 200mm power cable		


Model	Description
3U-HRACK(Optional)	Standard 19inch rack, caninstall 12 pcs batteries and 1 pcs High Voltage Battery cluster control box

Dimension (W×D×H)

Weight Approximate

530×602×2219mm

51kg

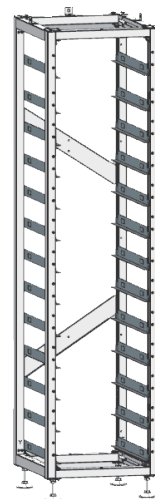


3U-LRACK(Optional)	Standard 19inch rack, caninstall 8 pcs batteries and 1 pcs High Voltage Battery cluster control box
--------------------	---

Dimension (W×D×H)

Weight Approximate


530×602×1629mm

41kg

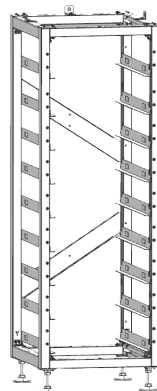


Typical Application Scenarios

BOS-G60-Pro

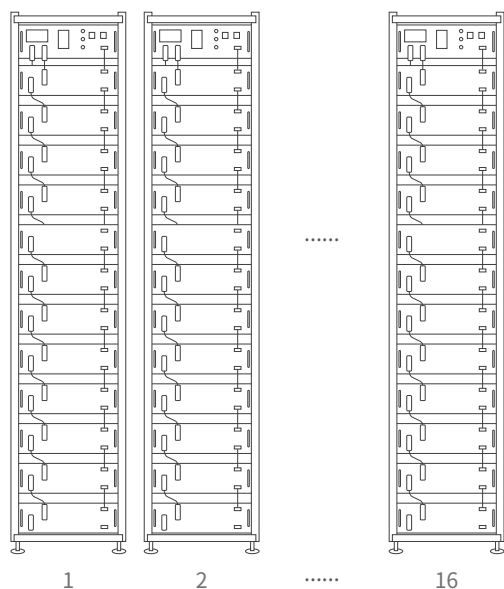


Maximum support for 16 racks of batteries in parallel

Inverter 50kW




BOS-G60-Pro

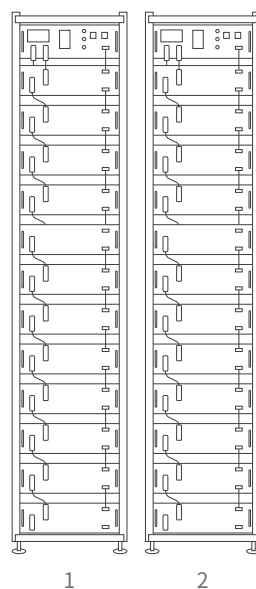


Maximum support for 10 inverters in AC parallel operation

Inverter 50kW




× 10

BOS-G85-Pro

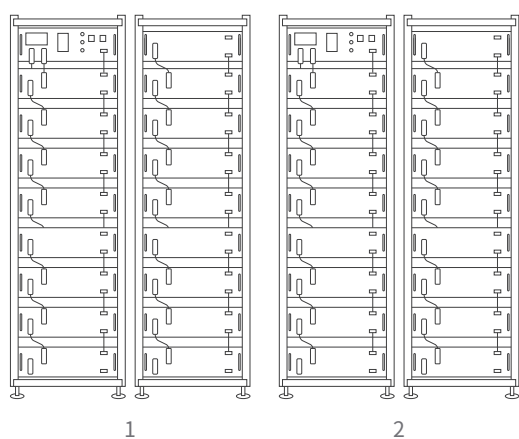


Maximum support for 16 clusters of batteries in parallel

Inverter 80kW




BOS-G85-Pro

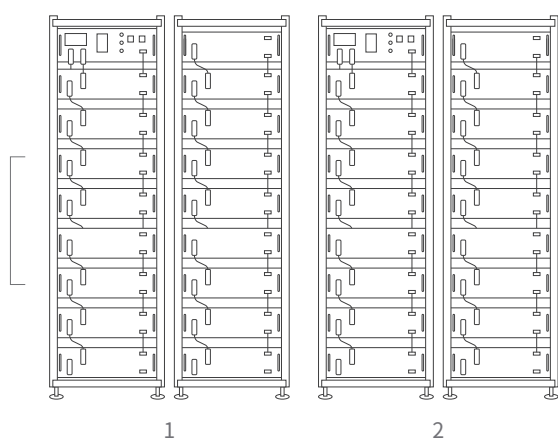

Maximum support for 10 inverters in AC parallel operation

Inverter 80kW



× 10



To Make ESS Better



Deye ESS Facebook



Deye ESS



www.deyeess.com