


SN identification method

The production date of the product can be determined from the serial number on the product label, as illustrated below. The serial number of the battery module corresponds to the production date.

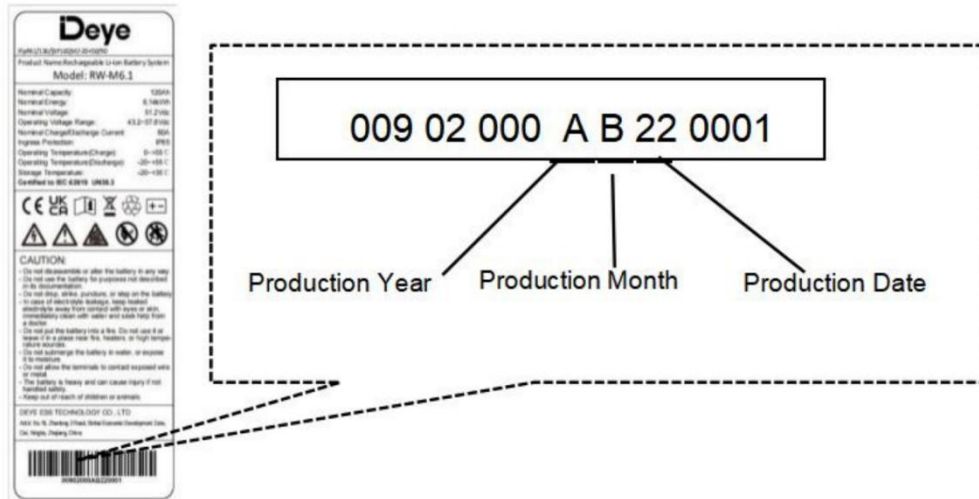

009	02	000	A	B	22	0001
			Year	Month	Day	

The year of production: The 9th digit represents the year of production, in capital letters. The year 2022 is A, 2025 is D and so on. The 26-letter cycle ends and continues from A.

The month of production: The 10th digit represents the month of production, 1 to 9 in numerals, A for 10, B for 11, C for 12.

The date of production: The 11th digit represents the date of production, 01 to 31.

TIPS:

BOS-GM5.1=BOS-G

BOS-G Pack5.1=BOS-G Pro

GB-LM4.0=GB-L

GB-L- Pro-Pack4.09=GB-L- Pro

GB-L Pro Extension

NOTICE: Do not contact the after-sales staff at Deye before battery system expansion. Otherwise it will affect the warranty.

1. In-Cluster capacity extension

The solution of customer's original GB-L Pro system extension along with new GB-L Pro.

Step 1: Verify the battery serial number (SN). If the manufacturing date difference between the new and old batteries is within one year, capacity extension is allowed.

Step 2: Prior to the extension, ensure the original system is **fully** charged to 100% State of Charge (SOC), and the new battery is also charged to 100% SOC. If **only 1 pcs** batteries are being added, use the charger for charging; if **2 pcs** or **more than 2 pcs batteries** are added, use the inverter for charging. For further details, please contact the after-sales staff at Deye.

Note: a. When charging **2 pcs** or **more than 2 pcs** GB-L Pro battery packs to full capacity using an inverter, the high-voltage box will display a SOC of 100% and a current reading of 0A.

b. For single-pack charging procedures, adhere to the GB-L Pro battery pack charging manual. If you need to check whether the battery pack of the single package is full charge, the historical data read by the upper computer shall prevail.

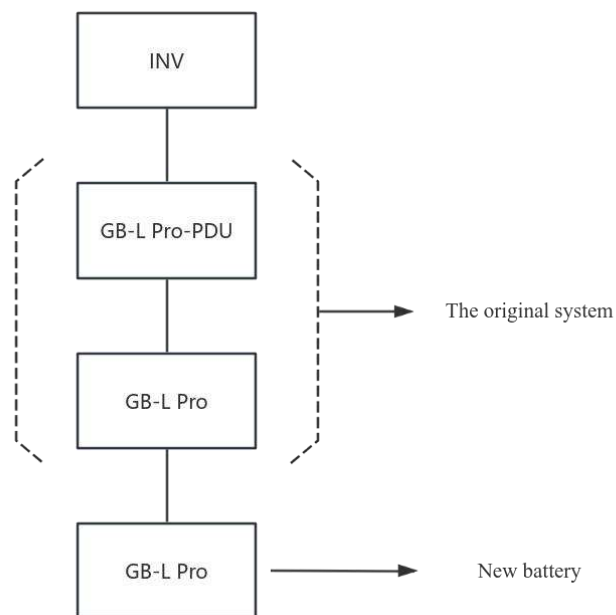


Figure 1 Network diagram

2. Cluster and cluster capacity extension

The solution of customer's original GB-L Pro system extension along with new GB-L Pro cluster.

Step 1: Verify the battery serial number (SN). If the manufacturing date difference between the new and old batteries is within two years, capacity extension is allowed.

Step 2: Update the firmware of the original system and the new system's GB-L Pro high voltage box to the same version. (Seek assistance from Deye staff for the update.)

Step 3: Charge the original GB-L Pro system and the new GB-L Pro system to full capacity, then connect them to the combiner box.

Step 4: Initiate GB-L Pro BMS 1 (master) first, and subsequently activate GB-L Pro BMS 2 (slave) once the BMU has been fully recognized.

Step 5: Please attach a terminal resistance to the out port of the last HV box when confronting a parallel communication issue. {The last HV box is GB-L (Pro) (BMS2) as figure 2}

Items to note:

1. Please ensure to purchase the 300A Combiner box manufactured by Deye before proceeding with the extension. (Combiner box material number: 10100802000004)
2. The quantity of batteries under all high-voltage boxes must be kept uniform to maintain an equal voltage level.
3. It is recommended to fully charge the battery cluster that needs expansion separately from the original battery cluster, and then perform the parallel connection.
4. The number of battery packs for the battery cluster that needs to be expanded should be the same as that of the original battery system.

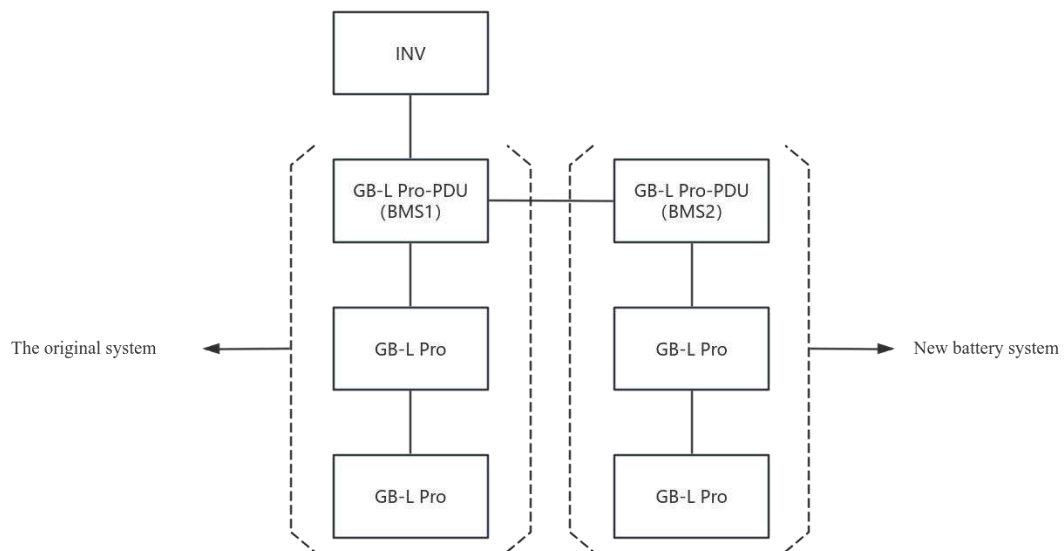


Figure2 Network diagram

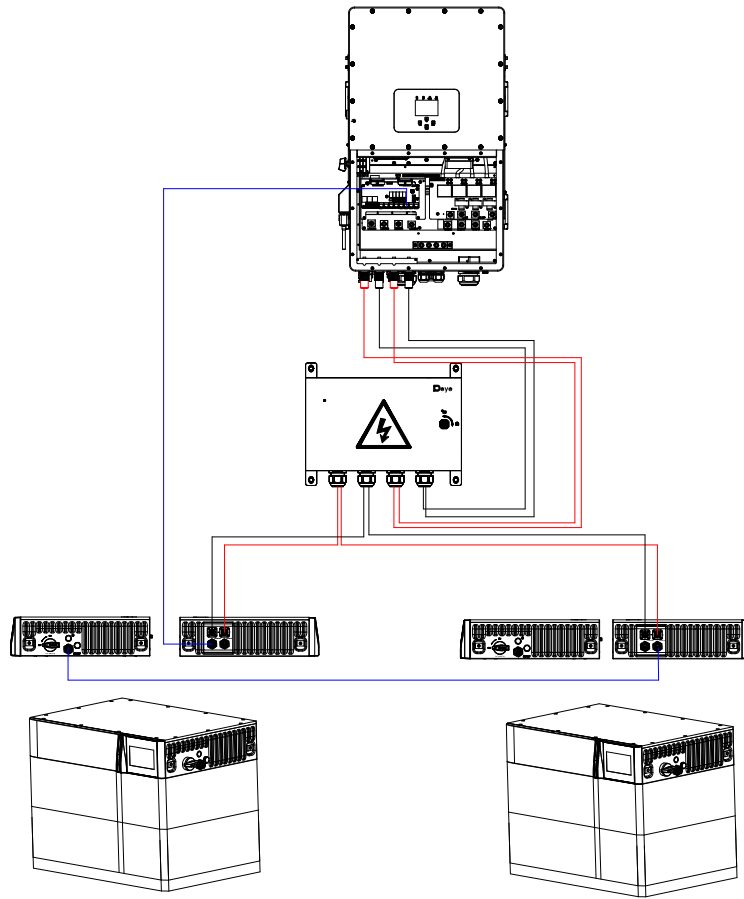


Figure 4 Cluster and cluster capacity extension wiring diagram

3. GB-L Pro Operation Guidance



4.Charging Tools

PN	SN
Supplementary charging harness UL2426 22AWG black 2-pin	30221105000071
P+ orange terminal connector	30220405000193
P- Black terminal connector	30220405000192
CAN BOX	30314100000041